



Die Abmessungen


400 t

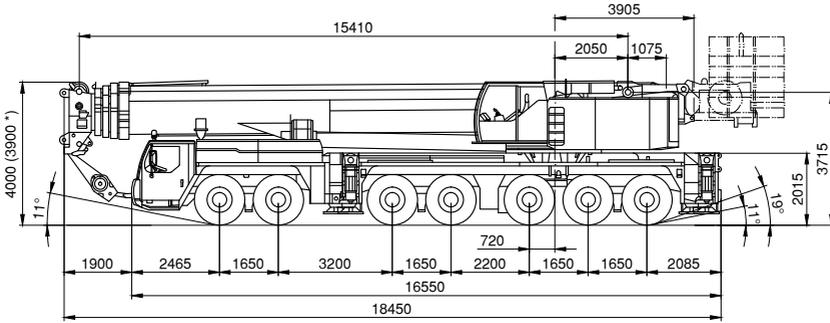

* = abgesenkt

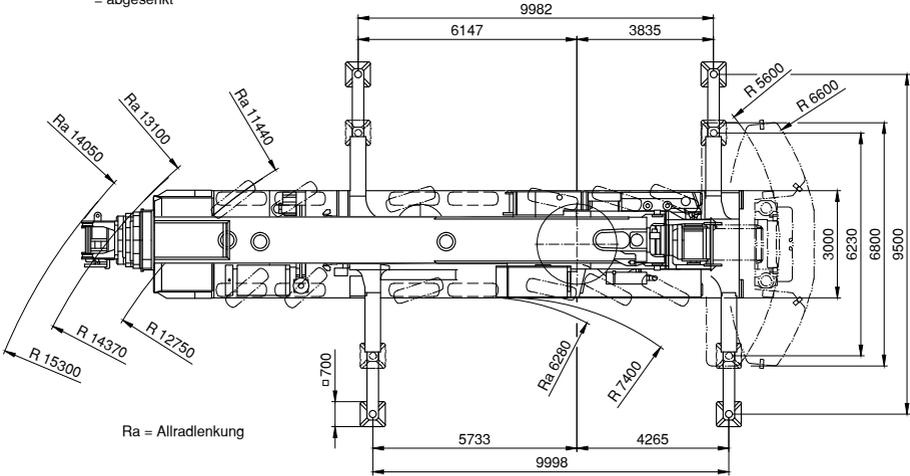

Ra = Allradlenkung




Höhe	Tragkraft	Eigengewicht
2140 mm	171,0 t	2700 kg
1655 mm	80,0 t	1000-3000 kg



Die Arbeitsbereiche

400 t

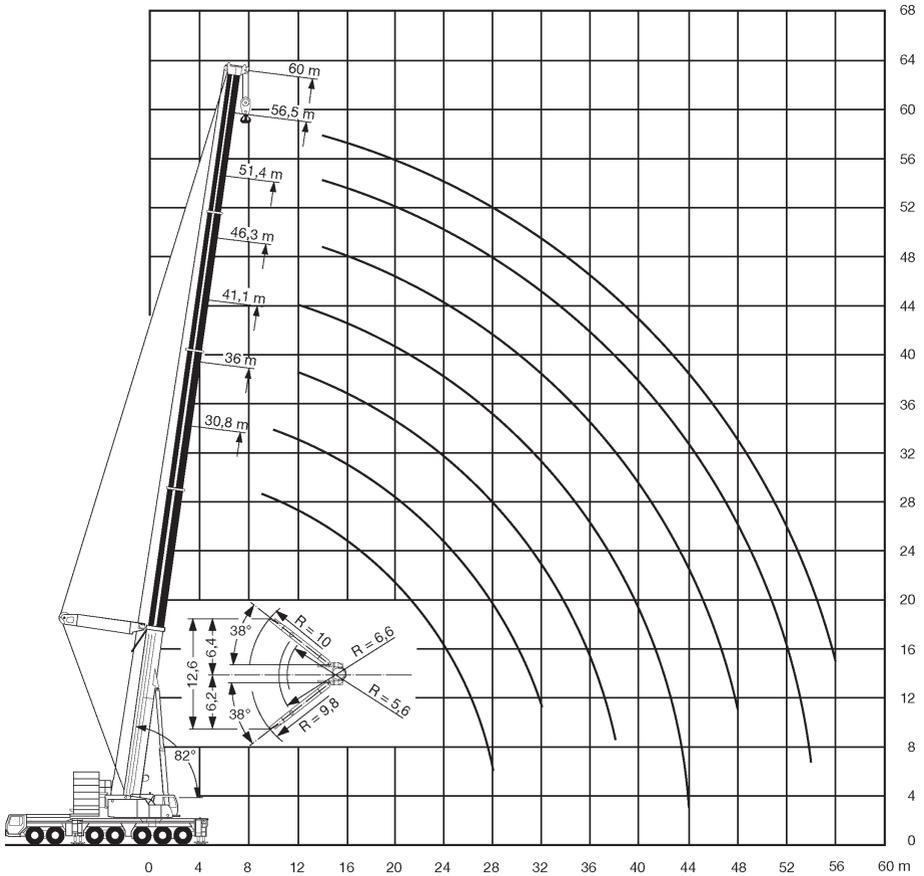



30,8-60m



140t



10x9,5m



360°



75%


ausgefahren

	30,8	36	41,1	46,3	51,4	56,6	60	
9	105							9
10	122	104						10
12	104	104	88	89				12
14	90	91	90	79	73	63	58	14
16	78	79	79	72	67	58	54	16
18	68	70	70	66	61	54	50	18
20	60	62	63	60	56	50	47	20
22	55	55	56	55	51	46,5	44	22
24	49,5	49,5	50	50	47,5	43,5	41	24
26	44,5	45	45,5	45,5	44,5	40,5	38,5	26
28	40	40,5	41	41	41	38	36	28
30		37	37,5	37,5	37,5	36	34	30
32		34	34,5	34,5	34	33,5	32	32
34			31,5	31,5	31	31	30,5	34
36			29	28,9	28,7	28,2	28,3	36
38			26,7	26,6	26,4	25,9	26	38
40				24,6	24,4	23,9	24	40
42				22,8	22,5	22,1	22,2	42
44				15,7	20,9	20,4	20,5	44
46					19,4	18,9	19	46
48					18,1	17,5	17,6	48
50						16,2	16,3	50
52						15,1	15,2	52
54						11	14,1	54
56							13,1	56

400t

Die Arbeitsbereiche

400 t

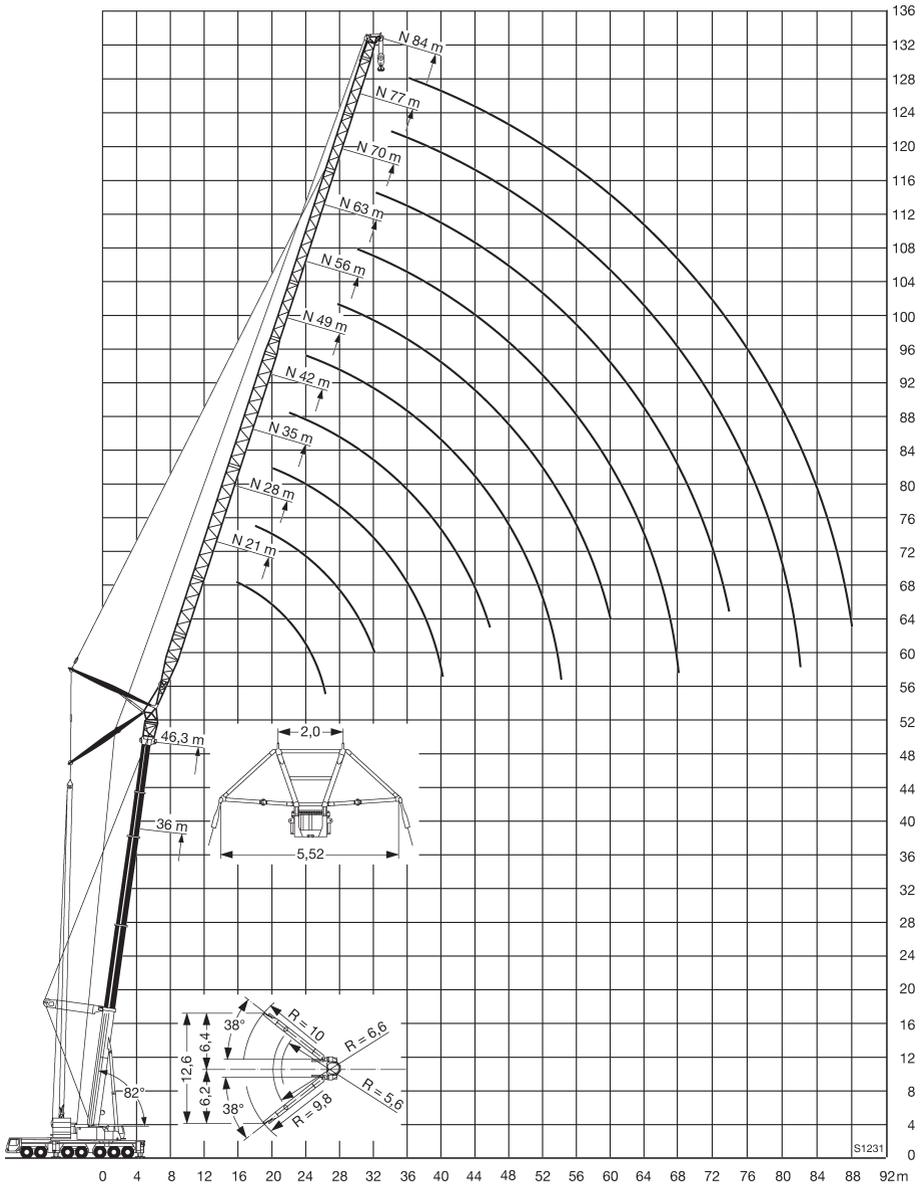

S1231



36m
82°



21-84m
S



100t



10x9,5m



360°



75%

 m	21	28	35	42	49	56	63	70	77	84	 m
14	64										14
16	59	53									16
18	55	51	43								18
20	51	48	42,5	34							20
22	46,5	45,5	41	34	27,4						22
24	42,5	42,5	39	34	27,4						24
26		40	37,5	33,5	27,4	22,3					26
28		37	36	32	27,4	22,3	18,4				28
30		34,5	34,5	31	27,4	22,3	18,4	14,9			30
32		31,5	32,5	29,9	26,9	22,3	18,4	14,9	12,4		32
34			30	28,9	26	22,3	18,4	14,9	12,4	9,7	34
36			28	27,9	25,2	22,3	18,4	14,9	12,4	9,7	36
38			26	26,6	24,4	21,7	18,4	14,9	12,4	9,7	38
40				25	23,6	21	18,4	14,9	12,4	9,7	40
42				23,5	22,9	20,4	18,3	14,9	12,4	9,7	42
44				22	21,7	19,9	17,9	14,9	12,4	9,7	44
46				19,9	20,5	19,3	17,4	14,9	12,4	9,7	46
48					19,4	18,8	17	14,7	12,3	9,7	48
50					18,4	18	16,6	14,4	12,2	9,7	50
52					17,4	17	16,2	14,1	12	9,7	52
54						16,1	15,7	13,8	11,7	9,7	54
56						15,3	14,9	13,6	11,5	9,7	56
58						14,6	14,1	13,3	11,3	9,7	58
60							13,4	12,8	11,1	9,7	60
62							12,8	12,2	11	9,5	62
64							12,2	11,6	10,8	9,4	64
66							11,6	11	10,6	9,3	66
68								10,5	10,3	9,2	68
70								10	9,8	9,1	70
72								9,5	9,3	8,7	72
74									8,8	8,3	74
76									8,4	7,9	76
78									8	7,5	78
80									7,6	7,1	80
82										6,7	82
84										6,4	84
86										6	86

* + 4m Adapter

400t



46,3m
82°



21-84m
S



100t



10x9,5m



360°



75%

m	46,3*										m
	21	28	35	42	49	56	63	70	77	84	
16	46,5										16
18	43,5	39,5									18
20	41	37,5	33,5								20
22	38,5	35,5	32	27,5							22
24	37	33,5	30,5	27,5	23						24
26	35,5	32	29	26,3	23						26
28		30,5	27,7	25,1	22,8	18					28
30		29,4	26,6	24	21,9	18	14,9				30
32		28,7	25,5	23	21,1	18	14,9	11,6			32
34			24,6	22,1	20,2	18	14,9	11,6	9,3		34
36			24,1	21,2	19,5	17,3	14,9	11,6	9,3	7,1	36
38			23,6	20,4	18,8	16,7	14,9	11,6	9,3	7,1	38
40			22,3	19,8	18,1	16,1	14,4	11,6	9,3	7,1	40
42				19,6	17,5	15,6	13,9	11,6	9,3	7,1	42
44				19,3	16,9	15	13,4	11,6	9,3	7,1	44
46				18,7	16,5	14,5	13	11,4	9,3	7,1	46
48					16,4	14,1	12,6	11,1	9,3	7,1	48
50					16,3	13,6	12,3	10,8	9,3	7,1	50
52					15,9	13,4	11,9	10,5	9,1	7,1	52
54					14,9	13,4	11,6	10,2	8,8	7,1	54
56						13,4	11,3	9,9	8,6	7,1	56
58						13,2	11,2	9,7	8,4	7	58
60						12,6	11,2	9,4	8,2	6,8	60
62							11,2	9,3	8	6,6	62
64							11,1	9,3	7,9	6,5	64
66							10,7	9,2	7,7	6,3	66
68							9,9	9,2	7,6	6,1	68
70								9,1	7,6	6	70
72								8,7	7,5	5,8	72
74								8,3	7,5	5,8	74
76									7,5	5,8	76
78									7,2	5,8	78
80									6,8	5,8	80
82									6,3	5,7	82
84										5,7	84
86										5,4	86
88										5	88

* + 4m Adapter

400 t



56,6m
82°



21-63m
S



100t



10x9,5m



360°



75%

 m	21	28	35	56,6*		49	56	63	 m						
				42											
18	34,5								18						
20	32,5	29,9							20						
22	30,5	28,2	25,7						22						
24	28,9	26,6	24,3	22,1					24						
26	27,6	25,2	23,1	21,1	19				26						
28	27,1	24	21,9	20,1	18,2				28						
30		22,9	20,9	19,1	17,4	14			30						
32		22	19,9	18,2	16,7	14	9		32						
34		21,4	19,1	17,4	15,9	14	9		34						
36			18,2	16,7	15,2	13,5	9		36						
38			17,8	16	14,6	12,9	9		38						
40			17,5	15,3	14	12,3	9		40						
42			17,3	14,8	13,4	11,8	9		42						
44				14,5	12,9	11,4	9		44						
46				14,2	12,4	10,9	9		46						
48				13,9	12	10,5	9		48						
50					11,8	10,1	9		50						
52						11,7	9,7	8,7	52						
54							11,5	9,5	8,4	54					
56								9,4	8,1	56					
58									9,3	7,8	58				
60										9,2	7,7	60			
62											9,1	7,6	62		
64												7,5	64		
66													7,4	66	
68														7,3	68

* + 4m Adapter

400t

